



PHI-CON

50 W DC-DC Converter P50C-Series

- 2:1 wide input voltage range
- High efficiency up to 92 %
- Over current protection
- Over voltage protection
- Over temperature protection
- Continuous short circuit protection
- Adjustable output voltage
- On/Off - remote control input
- Soft start
- Standard 2" x 1" package



Model guide

Type	Input voltage		Input current		Output voltage [V _{DC}]	Output current		Efficiency typ. [%]	Capacity load max. [μF]
	nominal [V _{DC}]	range [V _{DC}]	no load [mA] max.	full load [mA] typ.		[mA] min.	[mA] max.		
P50C123R3S	12	9...18	120	3020	3.3	0	10000	90	26000
P50C1205S	12	9...18	170	4600	5.0	0	10000	89	17000
P50C1212S	12	9...18	50	4700	12.0	0	4167	89	3300
P50C1215S	12	9...18	50	4630	15.0	0	3333	89	2200
P50C243R3S	24	18...36	70	1500	3.3	0	10000	91	26000
P50C2405S	24	18...36	90	2250	5.0	0	10000	91	17000
P50C2412S	24	18...36	40	2300	12.0	0	4167	91	3300
P50C2415S	24	18...36	30	2300	15.0	0	3333	91	2200
P50C483R3S	48	36...75	50	750	3.3	0	10000	91	26000
P50C4805S	48	36...75	60	1130	5.0	0	10000	92	17000
P50C4812S	48	36...75	30	1150	12.0	0	4167	91	3300
P50C4815S	48	36...75	40	1140	15.0	0	3333	89	2200

Specifications

Input	
Input Filter:	Pi- type
Start up voltage	P50C12xx: 8.6 V, typ. P50C24xx: 17.8 V, typ. P50C48xx: 24 V, typ.
Under voltage lockout	P50C12xx: 7.9 V, typ. P50C24xx: 16 V, typ. P50C48xx: 29 V, typ.
Start up time	50 ms, typ.
Input reflected ripple current	20 mA _{p-p} , typ (see fig. 1)
Remote control input Pin 3 (see figure 4a & 4b)	"On" 3.0...12 V or open input "Off" Short to -Vin or 0...1.2 V
Input idle current at Ctrl "Off"	5 mA at nominal Vin
Isolation input to output	
Isolation voltage, Input to output or to case, 1 minute tested	1600 V _{DC} , min.
Resistance	10 ⁹ Ω, min.
Capacitance	2000 pF, typ.
Output	
Over voltage protection with Z-diode clamp	P50Cxx3R3: 3.9 V P50Cxx05: 6.2 V P50Cxx12: 15 V P50Cxx15: 18 V
Voltage accuracy	±1 %
Voltage trim range	±10 %, max. (see figure 5)
Ripple and noise (at 20 MHz BW)	100 mV _{p-p} , max. (see figure 2)
Short circuit protection	Hiccup, automatic recovery
Line regulation	± 0.5 %, max.
Load voltage regulation at 0...100% load change	± 0.5 %
Temperature coefficient	± 0.02 % / °C
Transient recovery time at 25 % load change steps	250 μs, typ.
Transient response deviation at 25 % load change steps	± 3 %, max.
Over load protection	140 %, max. of full load


General	
Switching frequency	250 kHz, typ.
Standard in accordance with	EN-, IEC-, cUL-, UL 60950-1 EN-, IEC-, cUL-, UL 62368-1
Radiated emissions	EN 55032 class A
Conducted emissions	EN 55032 class A
ESD	IEC 61000-4-2 pref. criteria A
Radiated immunity	IEC 61000-4-3 pref. criteria A
Fast transient (see figure 3)	IEC 61000-4-4 pref. criteria A
Surge (see figure 3)	IEC 61000-4-5 pref. criteria A
Conducted immunity	IEC 61000-4-6 pref. criteria A
PFMF	IEC 61000-4-8 pref. criteria A
Reliability calculated (MIL-HDBK-217 F) @ 25 °C	MTBF > 200 000 h
Environmental	
Operating ambient temperature	-40 ...95 °C (with derating) -40 ...50 °C (without derating)
Storage temperature	-40 °C ...125 °C
Cooling	Air convection 30...60 LFM (16...33 cm/s)
Thermal impedance	P50CxxxxS: 9.5 K/W P50CxxxxSK: 8.5 K/W
Maximum case temp.	110 °C, max.
Over temperature protection	115 °C, typ
Storage humidity	95 %, non condensing
Physical	
Dimensions	P50CxxxxS: 50.8 x 25.4 x 12 mm P50CxxxxSK: 50.8 x 25.4 x 18.1 mm
Weight	P50CxxxxS: 45 g P50CxxxxSK: 56 g
Case material	Copper
Potting material	Epoxy, UL94V-0 rated
RoHS compliant	yes
Absolute maximum ratings	
Input surge voltage 100 ms max.	P50C12xx: 25 V _{DC} P50C24xx: 50 V _{DC} P50C48xx: 100 V _{DC}
Soldering temperature	≤ 260 °C, ≤ 10 s, ≥ 1.5 mm distance from case

Part number designation key

PHI-CON	Output power	Series designation	Input voltage range	Output voltage	Output configuration
P	50 50 W	C	12 9...18 V	3R3 3.3 V	S single output
			24 18...36 V	5 5 V	SK Single outp. with heat sink
			48 36...75 V	12 12 V	
				15 15 V	

50 W DC-DC Converter P50C-Series

Figure 1 Input reflected ripple current measure circuit

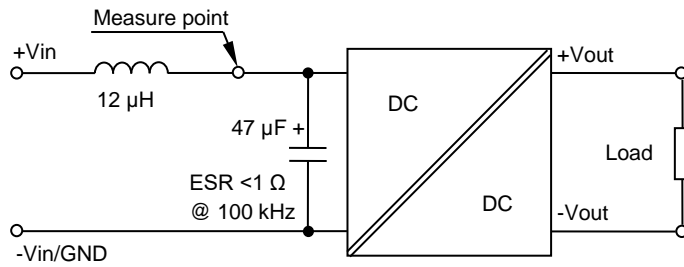

The input reflected ripple current is measured through a source inductor 12 µH and a source capacitor C_{in} 47 µF, ESR < 1 Ω at 100 kHz at nominal input voltage and full load.

Figure 2 Output ripple & noise measure circuit



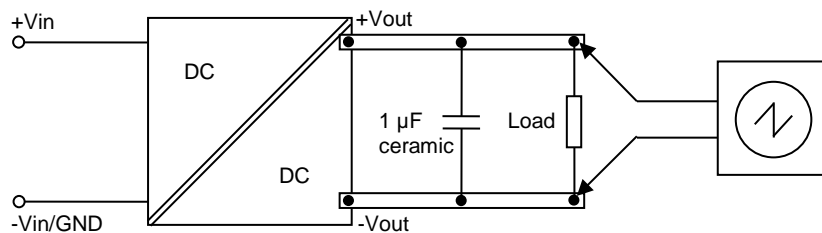


Figure 3 Recommended circuit to meet (EFT) IEC61000-4-4 and (Surge) IEC61000-4-5

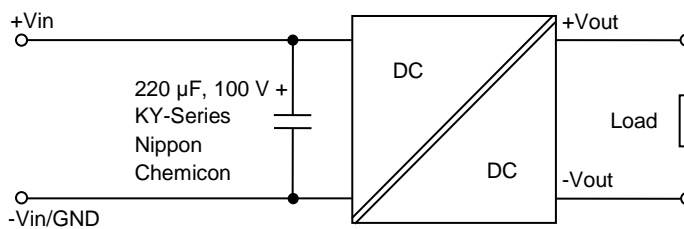


Output ripple & noise reduction

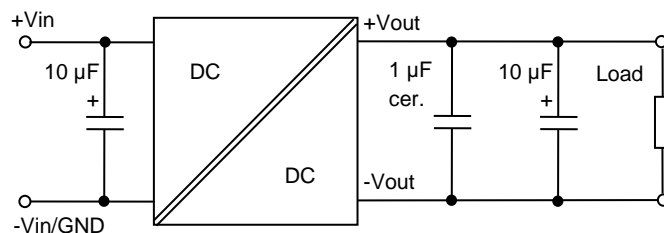

To reduce ripple and noise, it is recommended to use a ceramic capacitor and an electrolytic capacitor.

Figure 4a On / Off remote control circuit for positive logic

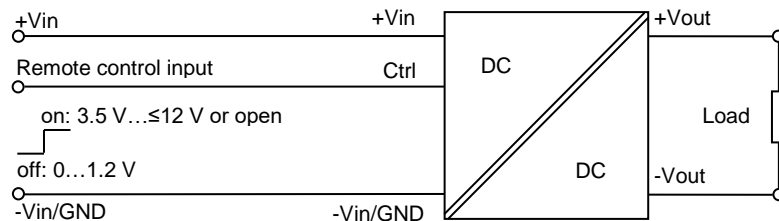

50 W DC-DC Converter P50C-Series

Figure 4b On / Off remote control circuit for inverse logic


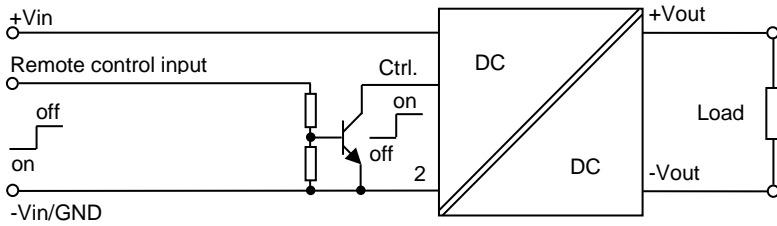


Figure 5 Trim circuit example

Output voltage trim function allows the user to increase or decrease the output voltage set point. the module maybe connected with an externalresistor (R_{trim}) between Trim and either +Vout or -Vout pin. By adjusting R_{trim} , the output voltage can be changed by 10 % of nominal output voltage.




P50Cxx3R3S											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	[%]
V out	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97	Vdc
R trim down	316	172	113	79.8	59.2	44.9	34.5	26.6	20.4	15.3	kΩ
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
V out	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63	Vdc
R trim up	545	184	103	67.7	47.7	34.8	25.9	19.3	14.2	10.3	kΩ
P50Cxx05S											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	[%]
V out	4.95	4.9	4.85	4.8	4.75	4.7	4.65	4.6	4.55	4.5	Vdc
R trim down	231	106	64.3	43.3	30.6	22.2	16.2	11.7	8.1	5.3	kΩ
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
V out	5.05	5.1	5.15	5.2	5.25	5.3	5.35	5.4	5.45	5.5	Vdc
R trim up	245	114	70.6	49.1	36.3	27.7	21.6	17	13.4	10.6	kΩ
P50Cxx12S											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	[%]
V out	11.88	11.76	11.64	11.52	11.4	11.28	11.16	11.04	10.92	10.8	Vdc
R trim down	327	142	83.9	55.5	38.6	27.4	19.5	13.5	8.9	5.3	kΩ
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
V out	12.12	12.24	12.36	12.48	12.6	12.72	12.84	12.96	13.08	13.2	Vdc
R trim up	371	184	118	84	63.5	49.8	39.9	32.5	26.7	22.1	kΩ
P50Cxx15S											
Trim down	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	[%]
V out	14.85	14.7	14.55	14.4	14.25	14.1	13.95	13.8	13.65	13.5	Vdc
R trim down	434	175	101	66	45.5	32.1	22.6	15.6	10.2	5.8	kΩ
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
V out	15.15	15.3	15.45	15.6	15.75	15.9	16.05	16.2	16.35	16.5	Vdc
R trim up	347	179	115	82	61.7	47.9	37.9	30.3	24.4	19.7	kΩ

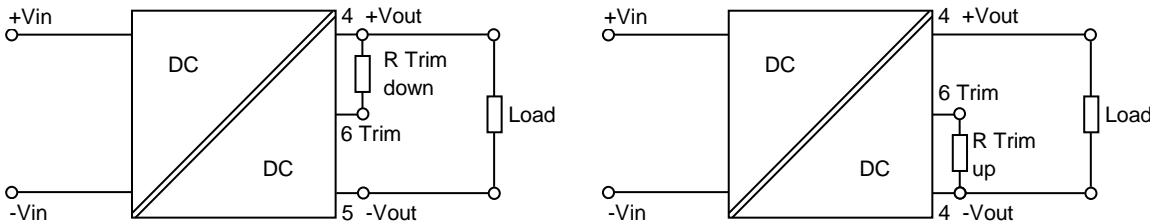


PHI-CON

50 W DC-DC Converter P50C-Series


P50C1205S Efficiency vs output current
@ Vin 12 V

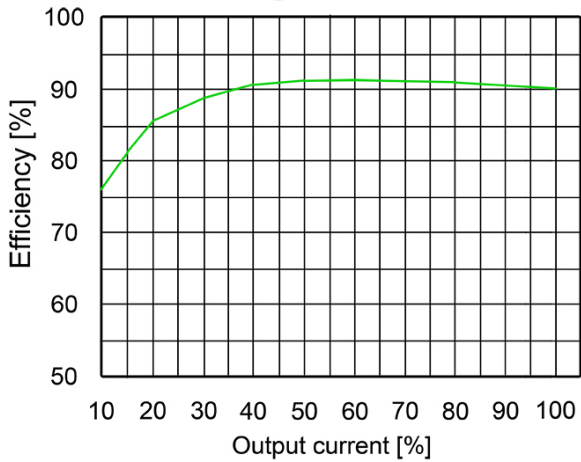


P50C2405S Efficiency vs output current
@ Vin 24 V

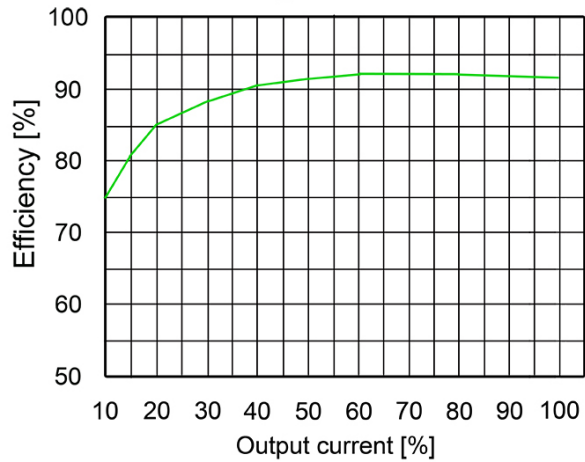


P50C2412S Efficiency vs output current
@ Vin 24 V

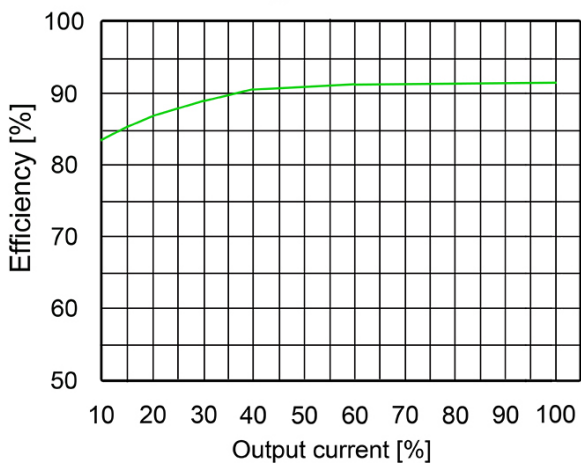


P50C4815S Efficiency vs output current
@ Vin 48 V

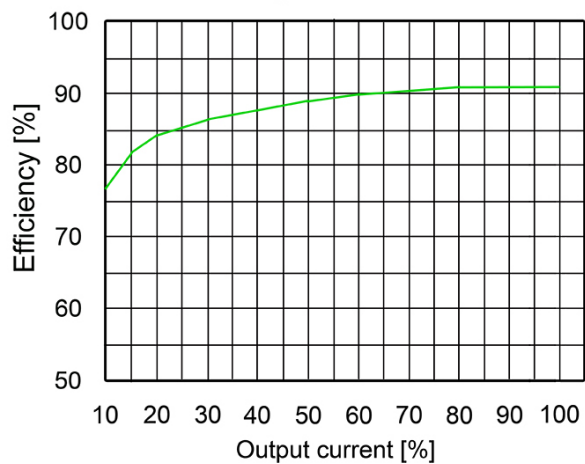

Derating diagram without heatsink

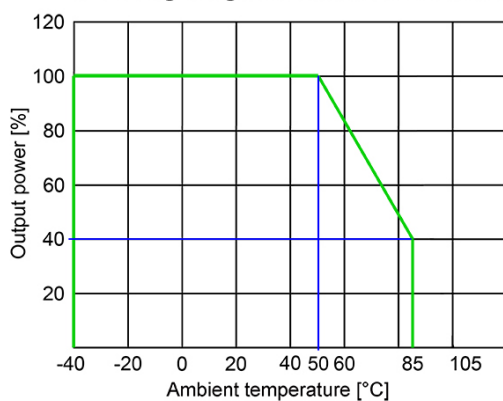

Derating diagram with heatsink

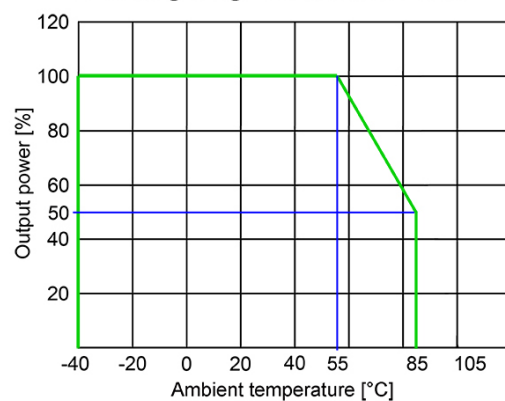




PHI-CON

50 W DC-DC Converter P50C-Series

Mechanical dimensions

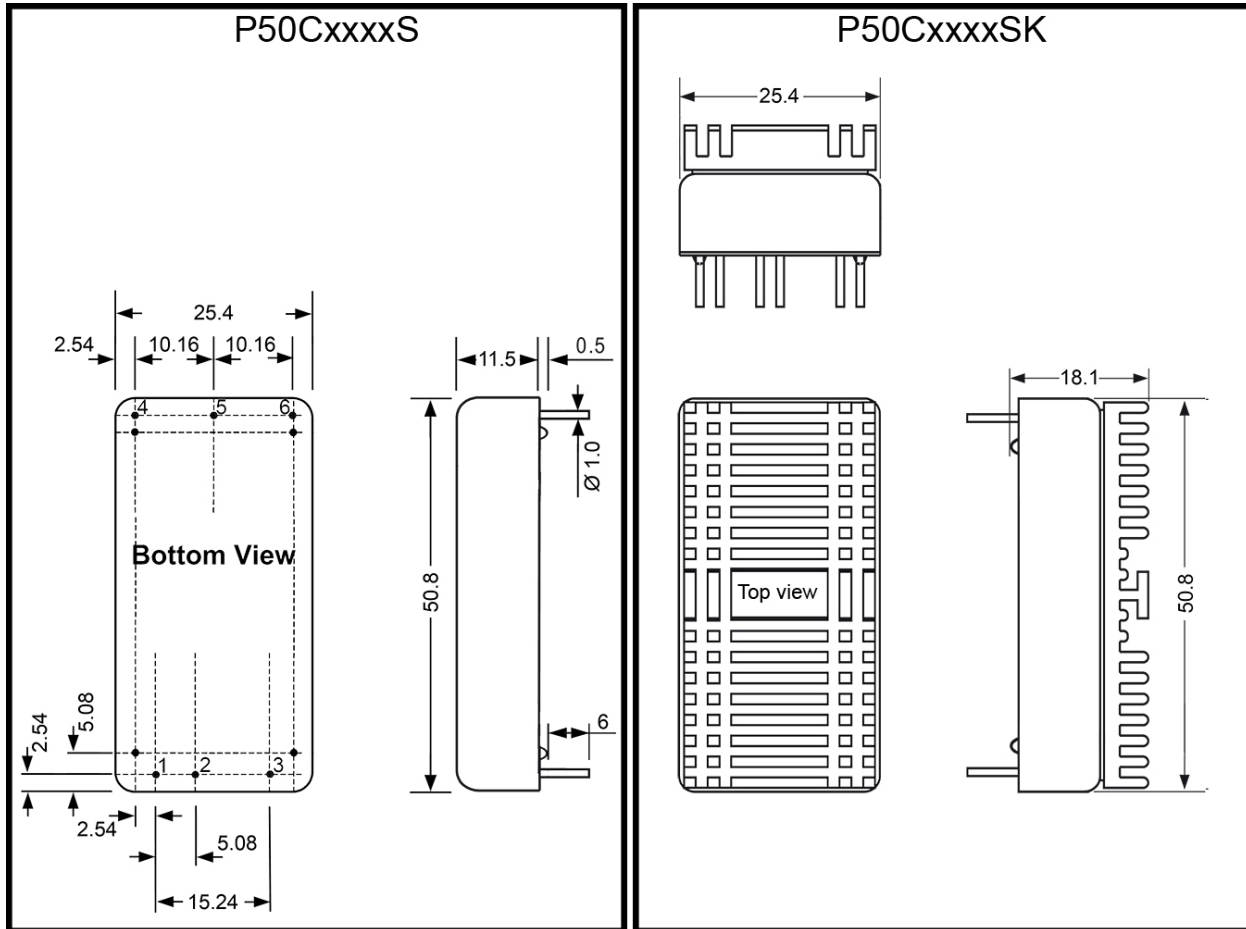

Dimensions in mm

1. Pin diameter tolerance: ± 0.05 mm
2. Pin length tolerance: ± 0.35 mm
3. Pitch tolerance: ± 0.35 mm
4. Case tolerance: ± 0.5 mm
5. Stand-off tolerance: ± 0.1 mm

Pin assignment	
1	+Vin
2	-Vin
3	Rem. Ctrl.
4	+Vout
5	-Vout
6	Trim

PHI-CON is a trademark of HY-LINE Holding GmbH.

Only for professional use by professionals! Not for resale or distribution to the general public in any way! Read the instructions carefully before using!

Life Support Policy: HY-LINE does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Rev: 20181004 f