

The Laird Connectivity Mini NanoBlade Flex antenna features a flexible printed circuit board that supports WLAN applications. The flexible board can be embedded in space-sensitive applications where a curved housing does not provide a flat surface for antenna mounting. The antennas are specifically designed to be embedded inside devices for aesthetically pleasing integration.

FEATURES AND BENEFITS

- Dual-band frequency coverage
- Flexible PCB for mounting in curved housing
- RoHS Compliant (2011/65/EU)

ELECTRICAL SPECIFICATIONS		
Operating Frequency (MHz)	2400-2500	4900-5875
Gain (dBi)	2.8	3.4
Efficiency (%)	68	59
VSWR, Max	2:1	
Polarization	Vertical, Omnidirectional	
Nominal Impedance (ohms)	50	


MECHANICAL SPECIFICATIONS	
Dimensions – mm (in.)	36 x 12 x 0.1 (1.42 x 0.47 x 0.004)
Hazardous Materials Compliance	RoHS Compliant (2011/65/EU)
Operational Temperature, °C (°F)	-35 to +85 (-31 to +185)
Storage Temperature, °C (°F)	-40 to + 85 (-40 to +185)

CONFIGURATION


PART NUMBER	CABLE LENGTH (Length x Diameter)	CONNECTOR	CONNECTOR ORIENTATION
MAF95310	185 mm (7.28 in.) x 1.13 mm (0.044 in.)	IPEX U.FL	A
EMF2449A1-10UFL	100 mm (3.94 in.) x 1.13 mm (0.044 in.)	IPEX U.FL	A
EMF2449A1-10MH4L	100 mm (3.94 in.) x 1.13 mm (0.044 in.)	IPEX MHF4L	A
EMF2449A2-10MHF1	100 mm (3.94 in.) x 1.13 mm (0.044 in.)	MHF1	B
EMF2449A2-25MHF1	125 mm (4.92 in.) x 1.13 mm (0.044 in.)	MHF1	B
EMF2449A1-36MHF1	355 mm (14.0 in.) x 1.13 mm (0.044 in.)	MHF1	A

Note: This antenna is available in many connector and cable configurations. Contact us at 1-847-839-6925 or sales@lairdconnect.com for more information.


MECHANICAL DRAWING - MHF1 VERSION

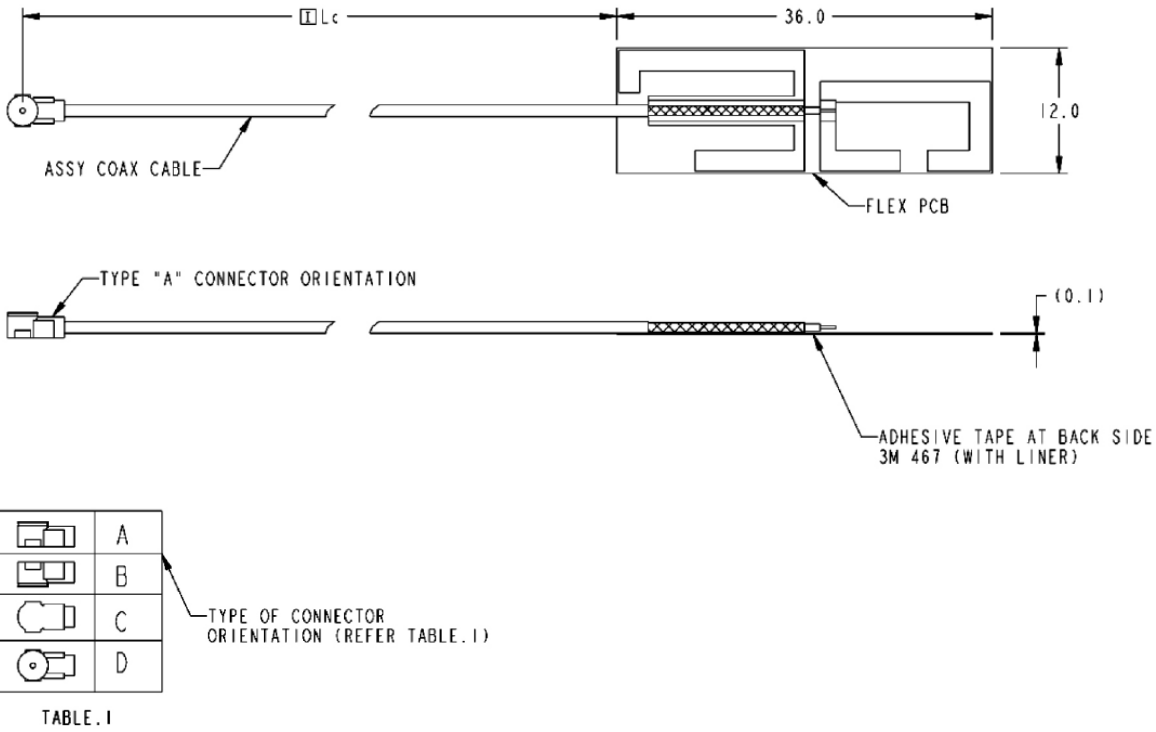


MECHANICAL DRAWING - MHF4L VERSION

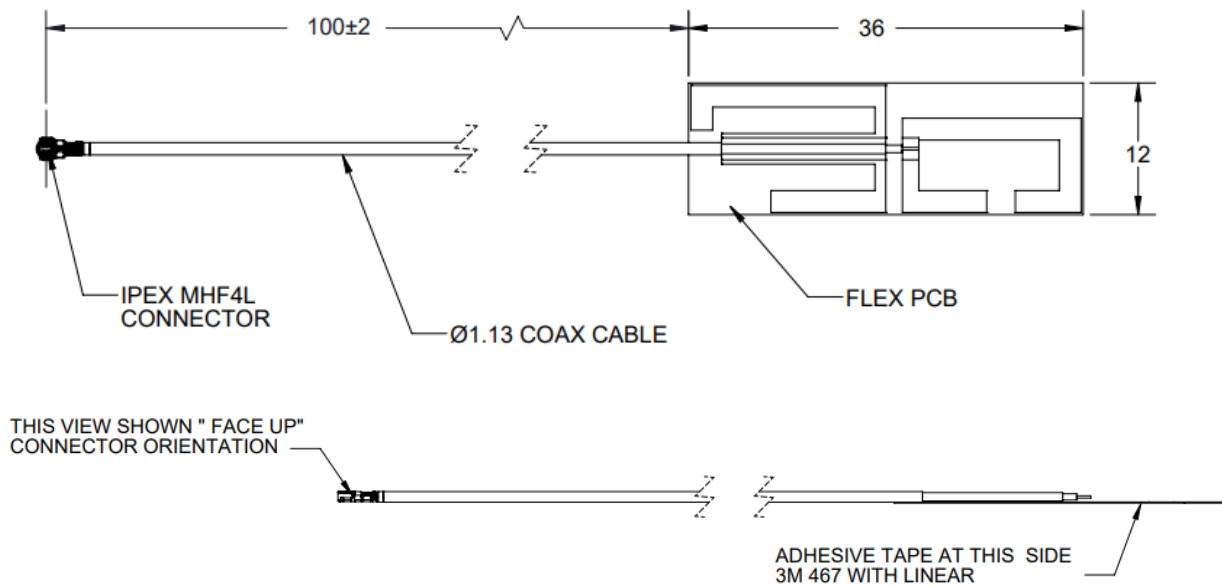


RETURN LOSS

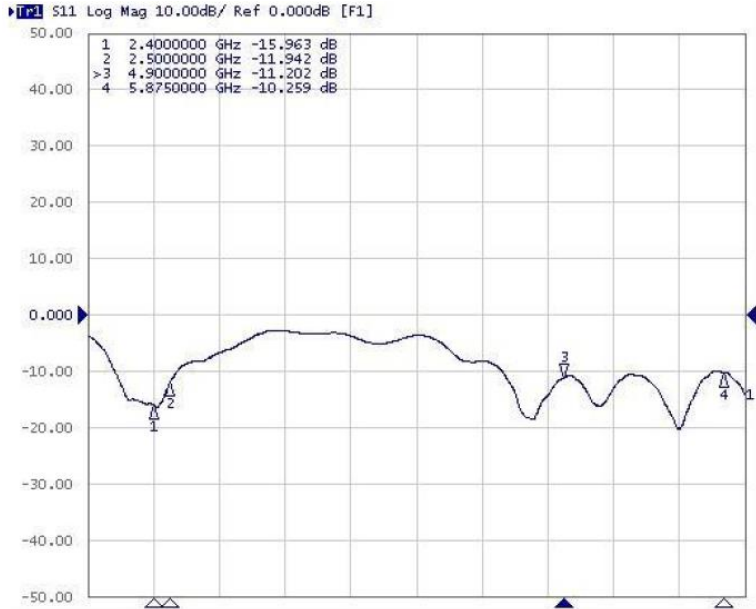

RADIATION PATTERNS

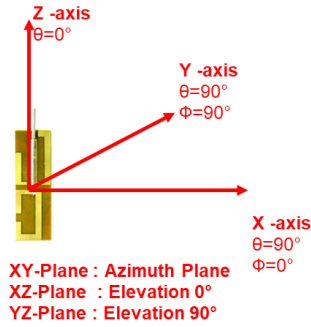


2400 MHz

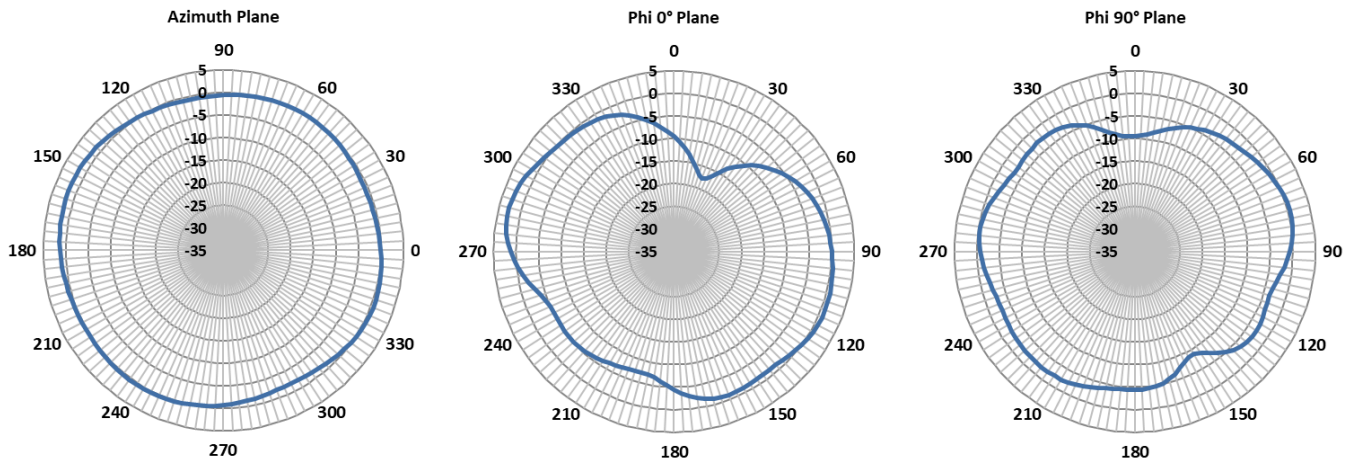


RADIATION PATTERNS


2450 MHz

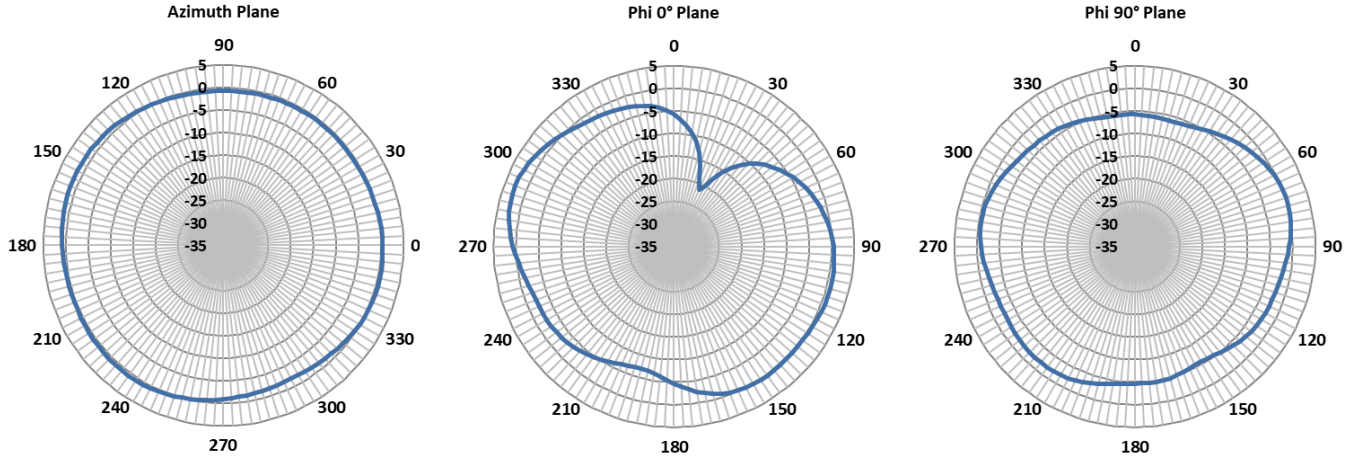

2500 MHz

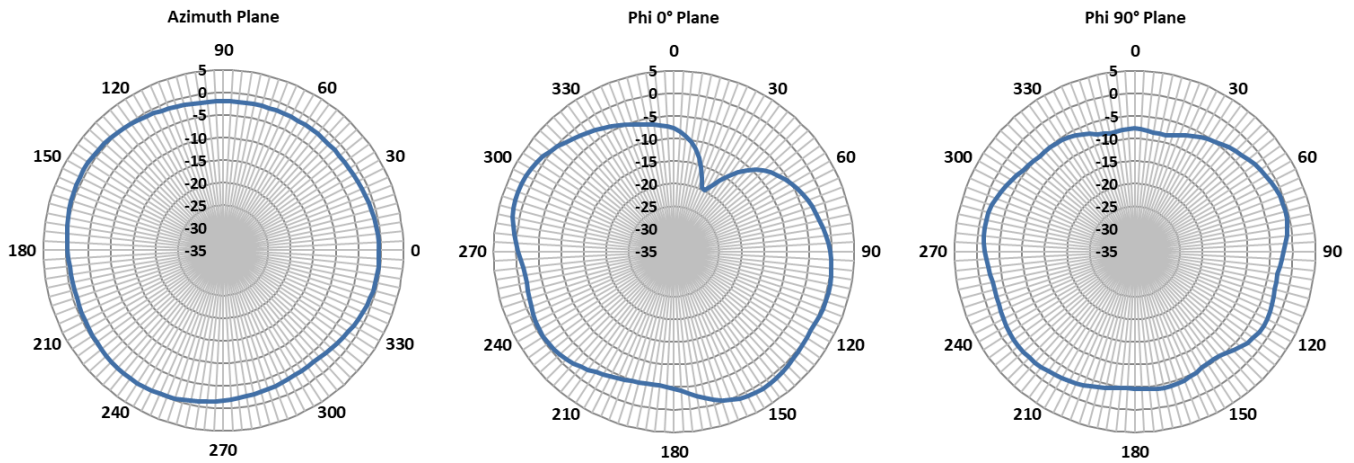


4900 MHz

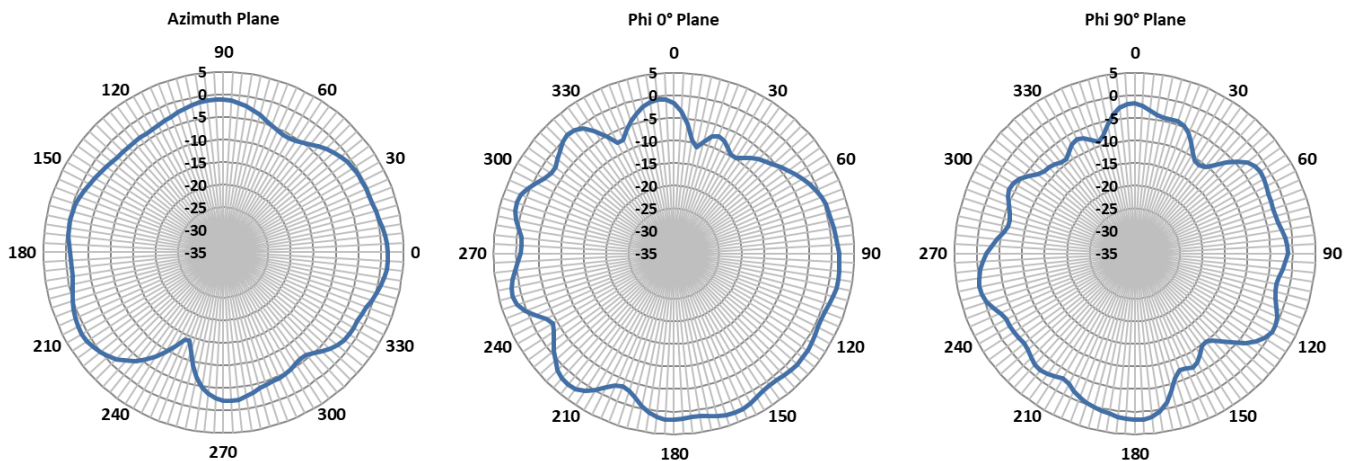


RADIATION PATTERNS

5470 MHz

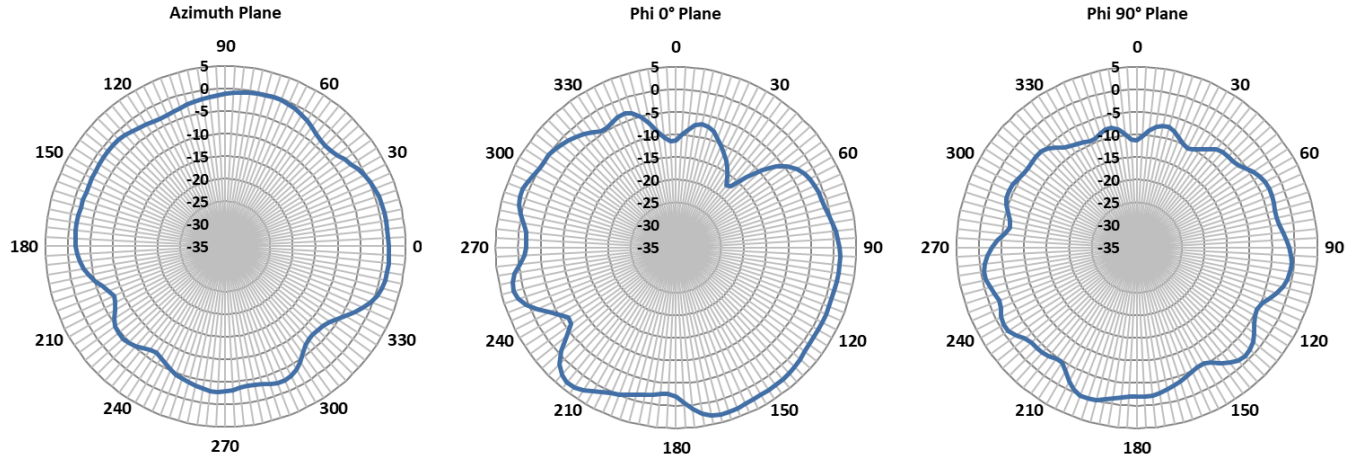

5875 MHz

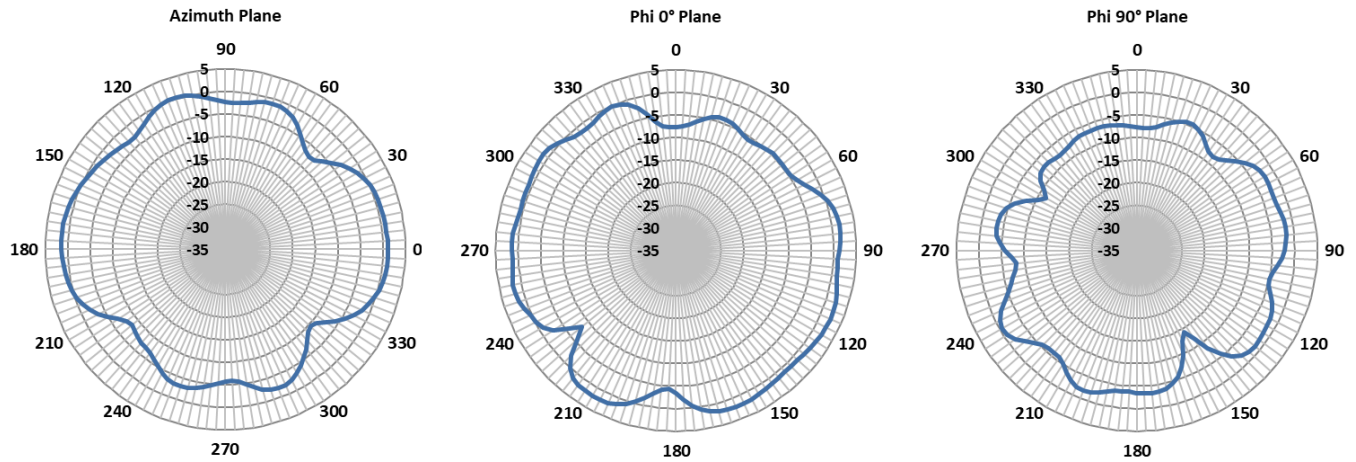

sales@lairdconnect.com
support@lairdconnect.com
www.lairdconnect.com

© Copyright 2022 Laird Connectivity. All Rights Reserved. Patent pending. Any information furnished by Laird Connectivity and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Connectivity materials or products rests with the end user since Laird Connectivity and its agents cannot be aware of all potential uses. Laird Connectivity makes no warranties as to non-infringement nor as to the fitness, merchantability, or sustainability of any Laird Connectivity materials or products for any specific or general uses. Laird Connectivity or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird Connectivity products are sold pursuant to the Laird Connectivity Terms and Conditions of Sale in effect from time to time, a copy of which will be furnished upon request. Nothing herein provides a license under any Laird Connectivity or any third-party intellectual property right.