



2 x 4" 250W AC-DC Power Supplies


<https://product.tdk.com/en/power/cus-m>
www.emea.lambda.tdk.com/cus250m

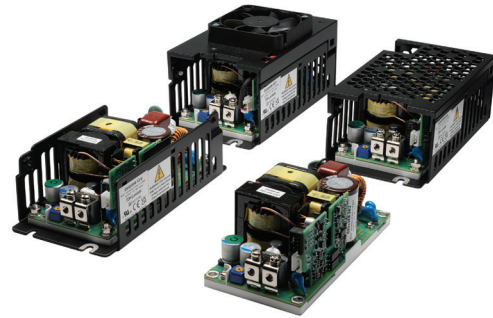

The compact CUS250M is packaged in the industry standard 2x4" footprint. The series can deliver 250W with forced air or conduction cooling in ambient temperatures of up to 45°C. With Medical & ITE certifications, the unit can be used in both Class I & Class II (no ground wire) applications, and meets Class B Conducted and Radiated EMI with generous margins. Input voltage range includes operation down to 80Vac (see instruction manual for ratings). Other options include a 5V standby voltage, remote on/off, DC_OK and AC_Fail signals, with a U channel, cover or top fan mechanical construction.

Features	Benefits
• Up to 250W Utilizing Convection and Conduction Cooling	• Quiet Operation
• Operation in Ambient Temperatures of up to 85°C	• Suitable for High Ambient Temperature Environments
• Medical Certifications (2 x MOPP)	• Suitable for B and BF Type Medical Equipment
• Class B Conducted and Radiated EMI with Significant Margins	• Easier System EMC Compliance
• Certified for Class I and Class II installations	• Flexible Utilisation
• Compact 2 x 4 x 1.56" / 50.8 x 101.6 x 39.5mm Size	• Space Saving in End Equipment
• Enclosure & Cooling Options	• Versatile Application
• EN60335-1 Compliant	• Suitable for Household and Similar Electrical Appliances

Model Selector					
Model	Nominal Output Voltage (V)	Output Adjustment ⁽¹⁾ (V)	Fan Supply (V)	Maximum Current Forced Air (A)	Maximum Power Forced Air (W)
CUS250M-12	12	12 - 13.2	11.4	20.83	250
CUS250M-15	15	15 - 16.5	11.4	16.66	250
CUS250M-18	18	18 - 19.8	11.4	13.88	250
CUS250M-24	24	24 - 26.4	11.4	10.41	250
CUS250M-28	28	28 - 30.8	11.4	8.92	250
CUS250M-36	36	36 - 39.6	11.4	6.94	250
CUS250M-48	48	48 - 52.8	11.4	5.2	250

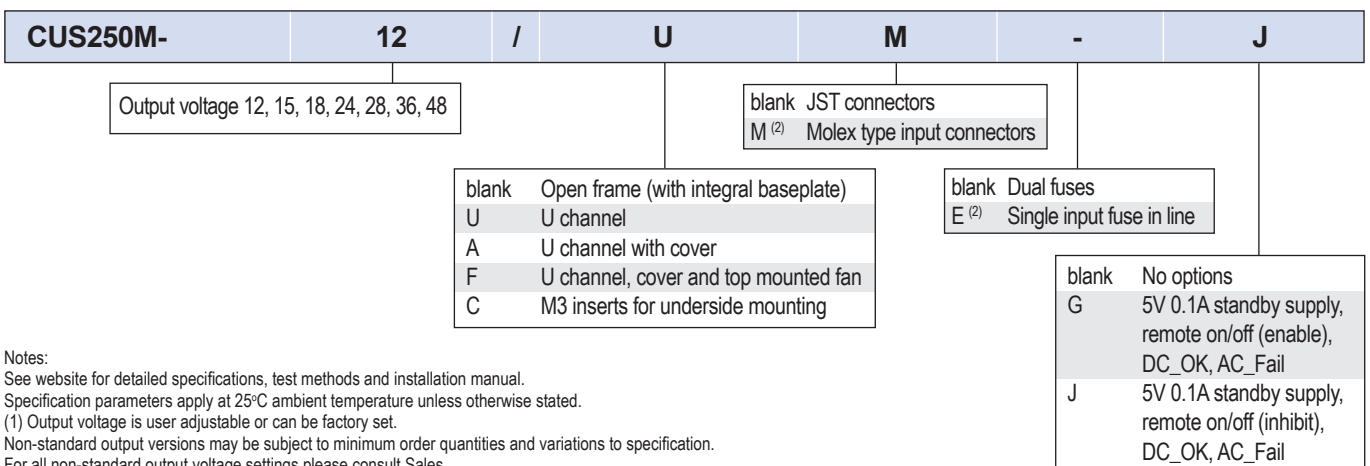

Notes:
 See website for detailed specifications, test methods and installation manual.
 Specification parameters apply at 25°C ambient temperature unless otherwise stated.
 (1) Output voltage is user adjustable or can be factory set.
 Non-standard output versions may be subject to minimum order quantities and variations to specification.
 For all non-standard output voltage settings please consult Sales.
 (2) Subject to Minimum Order Quantities. Please contact Sales

Specifications		
Model		CUS250M
Input		
Input Voltage Range (Operating)	Vac	80 - 264 ⁽³⁾
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 80-264Vac)
Input Frequency	Hz	47 - 63 ⁽⁴⁾
Input Current (100Vac)	A	3.1
Inrush Current at 230Vac (Cold Start)	A	<75. Note: the inrush I ² t is significantly below the rating of the internal 5A fast acting fuse, or an external circuit breaker
Leakage Current	uA	<150 at 264Vac 63Hz
Touch Current (Enclosure Leakage)	uA	Class I: <10, Class II: <70, at 264Vac 63Hz
Power Factor (115/230Vac)	-	>0.9 / >0.7 (>20% load)
Harmonic Compliance	-	Meets IEC61000-3-2 Class A
No Load Power Consumption	W	<0.5 (230Vac) when output is inhibited
Hold Up Time	ms	>14
Efficiency	%	Up to 94
Average Efficiency	%	>91 Measured at 25%, 50%, 75% and 100% load conditions
Conducted & Radiated EMI	-	EN55032 / EN55011-B (See application notes for conditions)
Immunity	-	Compliant with EN60601-1-2:2015 (Edition 4), see immunity table
Insulation Class	-	Construction suitable for Class I or Class II installation
Safety Certifications and Markings	-	IEC/ES/EN60601-1, IEC/UL/EN62368-1, 60950-1. Compliant to IEC/EN60335-1 ⁽⁵⁾ and IEC/EN61010-1, CE Mark and UKCA Mark

Notes:

(3) Derate output power linearly by 1%/Vac to 225W load from 100 to 90Vac input. Output power is reduced by 2%/Vac between 90Vac and 80Vac (180W at 80Vac)

(4) For operation at 440Hz please consult Technical Sales.

(5) 12 and 24V models only


Immunity			
Test	Test	UOM	Level & Criteria
IEC61000-4-2 (ESD)	Enclosure Port	Lvl	Level 4, Criteria A
	AC Port	Lvl	Level 4, Criteria A
	CH1 and Standby	Lvl	Level 3, Criteria A
	Signal I/O Port (Remote On/Off, AC_FAIL, DC_OK)	Lvl	Level 3, Criteria A
IEC61000-4-3 (Radiated Immunity)	80 MHz to 2.7 GHz	V/m	10 (Level 3, Criteria A)
	2.7 GHz to 6 GHz	V/m	10 (Level 3, Criteria A)
EN 60601-1-2:2015 (Radiated Immunity)	Immunity to RF Wireless Communications Equipment (Table 9)	-	All Criteria, Criteria A
CISPR 35	1.8 GHz to 5 GHz	V/m	3 (Table 1, condition 1.3 requirements, Criteria A)
IEC 61204-3: 2000	900 MHz (Keyed Carrier)	V/m	3 (Criteria A)
IEC61000-4-4 (Electrical Fast Transient Burst)	AC Port	kV	4 (Level 4, Criteria A)
	CH1	kV	2 (Level 4, Criteria A)
	Fan Out, Standby	kV	N/A
	Signal I/O Port (Remote On/Off, AC_FAIL, DC_OK)	kV	2 (Level 4, Criteria A)
IEC61000-4-5 (Surge)	(AC input common mode)	kV	2 (Level 3, Criteria A)
	(AC input normal mode)	kV	1 (Level 3, Criteria A)
IEC61000-4-6 (Conducted Susceptibility)	(AC input common mode)	V	10 (Level 3, Criteria A)
	(DC output common mode)	V	10 (Level 3, Criteria A)
	(Fan Out, Standby common mode)	V	N/A
	(Signal I/O common mode)	V	N/A
IEC61000-4-8 (Power Frequency Mag. Field)		A/m	(Level 4, Criteria A)
IEC61000-4-11 (Voltage dips / Interruption)	When exited factory (Bulk cap life degradation not considered)	-	Class 3
	0% for 0.5 cycle	Criteria	A
	0% for 1 cycle	Criteria	A ≤175W, B >175W
	40% for 10/12 cycles	Criteria	100Vac: A ≤50W, B >50W; 220Vac: A
	70% for 25/30 cycles	Criteria	100Vac: A ≤150W, B >150W; 220Vac: A
IEC60601-1-2 (Voltage dips / Interruption)	80% for 250/300 cycles	Criteria	100Vac: A ≤200W, B >200W; 220Vac: A
	0% for 250/300 cycles	Criteria	B
	When exited factory (Bulk cap life degradation not considered)	-	-
	0% for 0.5 cycle	Criteria	A
	0% for 1 cycle	Criteria	A ≤175W, B >175W
IEC61000-6-2 (Voltage dips / Interruption)	70% for 25/30 cycles	Criteria	100Vac: A ≤150W, B >150W; 220Vac: A
	0% for 250/300 cycles	Criteria	B
	0% for 1 cycle	Criteria	B
	40% for 10/12 cycles	Criteria	C
	70% for 25/30 cycles	Criteria	C
IEC61204-3 (Voltage dips / Interruption)	0% for 250/300 cycles	Criteria	C
	30% for 10 ms	Criteria	B
	60% for 100 ms	Criteria	100Vac: A ≤70W, B >70W; 220Vac: A
	95% for 5000 ms	Criteria	C
SEMI F47	50% for 0.2 s	Criteria	170Vac: A ≤240W, B >240W; 220Vac: A
	70% for 0.5 s	Criteria	A
	80% for 1s	Criteria	A
		Criteria	A
IEC61000-4-12 (Ringwave Test)		-	(Level 3, Criteria A)
EN61000-4-14 (Voltage Fluctuations)		-	Class 3, Criteria A

Specifications		
Model		CUS250M
Output		
Switching Frequency	kHz	Variable frequency from 25 to 300 (excluding burst mode) for the PFC, DC-DC and flyback converters. Frequencies vary with input voltage, output voltage and output load.
Line Regulation	%	<0.5 (85 - 264Vac)
Load Regulation	%	<1 (0 - 100% load)
External Load Capacitance	µF	12V: 20,830, 15V: 16,660, 18V: 9,440, 24V: 2,290, 28V: 4,460, 36V: 3,470, 48V: 1,300 <1 of nominal output for operating temperatures above 0°C
Ripple & Noise	%	12V model: <2, other voltages: <1.5 at -20°C. <2 in burst mode when the load is <10% of the rated current External load capacitance will reduce the amplitude.
Temperature Coefficient	%/°C	±0.02
Minimum Load	-	No minimum load required
Overcurrent Protection	%	110 to 170. Hiccup mode, automatic recovery
Overvoltage Protection	-	115-140% of standard output voltage Latching (unit shutdown), cycle AC input or use remote on/off to reset
Overtemperature Protection	-	Latching, cycle AC or use remote on/off to reset
Remote Sense	-	None
Remote On/Off (Optional)	-	Opto-isolated. Inhibit: High = OFF, Low = ON, Enable: High = ON, Low = OFF
Standby Voltage (Optional)	-	5V 0.1A
Fan Supply (Standard)	-	11.4V 0.5A
DC_OK Signal (Optional)	-	Opto-isolated signal, transistor is on when main output is good
AC_Fail signal (Optional)	-	Opto-isolated signal, transistor is on when AC input is good
Parallel Operation	-	Not possible
Series Operation	-	Not possible
Environmental		
Operating Temperature (-40°C start-up)	°C	-20 to +85 with system forced air cooling (70 maximum for fan version /F), see derating curves below
Storage Temperature	°C	-40 to +85 (70 maximum for fan version /F)
Operating Humidity (non condensing)	%RH	5 - 95 (15 - 90 for /F fan version)
Pollution Degree	-	PD2 Material group IIIb
Cooling	-	Convection, conduction or forced air cooling. See derating curves below
Altitude	m	5,000
Withstand Voltage (For 1 minute)	Vac	Input to Ground 1,500 (1xMOPP), Input to Output 4,000 (2xMOPP), Output to Ground 1,500 (1xMOPP)
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500VDC
Vibration (non operating)	-	2G, 10-500Hz for 1 hour
Shock (non operating)	-	30G, 11ms half sine
Other		
Weight	g	Open frame: 275, /A: 320, /C: 275, /F: 345, /U: 305
Size (WxLxH)	mm	Open frame : 50.8 x 101.6 x 39.5
		U channel : 64 x 119.2 x 39.5
		Cover (/A) : 64 x 119.2 x 43
		Fan (/F) : 64 x 119.2 x 60.6
Size (WxLxH)	Inches	Open frame: 2 x 4 x 1.56
		U channel : 2.52 x 4.69 x 1.56
		Cover (/A) : 2.52 x 4.69 x 1.69
		Fan (/F) : 2.52 x 4.69 x 2.39
Connectors	-	Input: JST B2P3-VH, Output: M3 screw, Fan: Molex 22-05-7025, Signals: Molex 87833-0833
Warranty	yrs	5

Peak Power Rating Curves

U chassis configuration, convection cooled on metal baseplate

50°C, 10% Duty Cycle

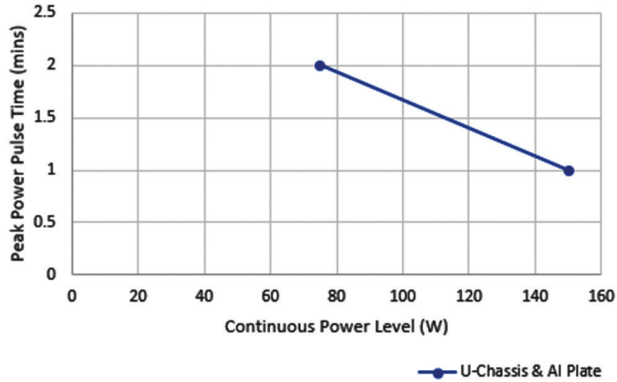


Examples:
 150W continuous - 250W peak - 1 min pulse time - 10% duty cycle
 75W continuous - 250W peak - 2 mins pulse time - 10% duty cycle

Peak Power Rating Curves

Open frame configuration, convection cooled (no metal baseplate)


25°C, 10% Duty Cycle

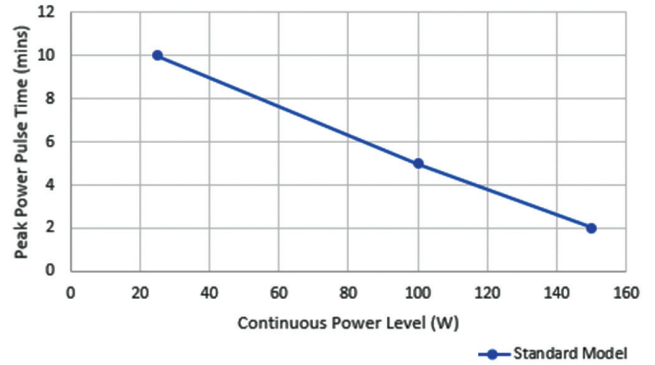


Examples:
 150W continuous - 250W peak - 2 mins pulse time - 10% duty cycle
 100W continuous - 250W peak - 5 mins pulse time - 10% duty cycle
 25W continuous - 250W peak - 10 mins pulse time - 10% duty cycle

Orientation

Horizontal Orientation A

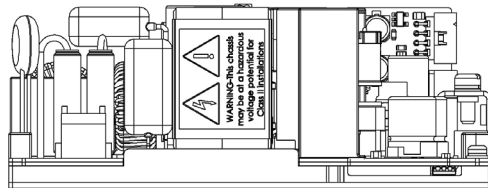


Vertical Orientation B



Notes:
 See website for detailed specifications, test methods and installation manual.
 Specification parameters apply at 25°C ambient temperature unless otherwise stated.


Output Power vs Ambient Temperature

Conduction/convection cooled CUS250M-12

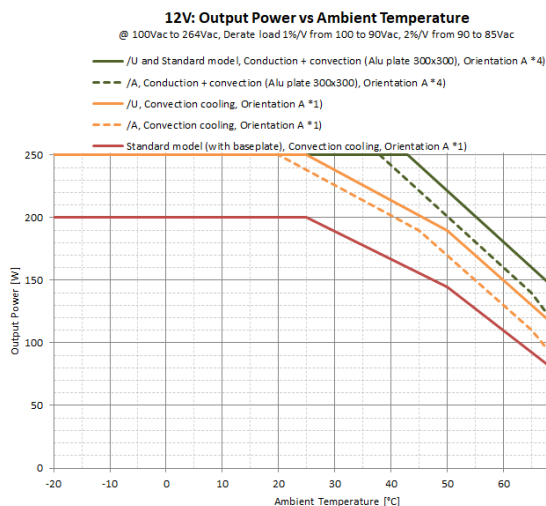


Output Power vs Ambient Temperature


Conduction/convection cooled CUS250M-24

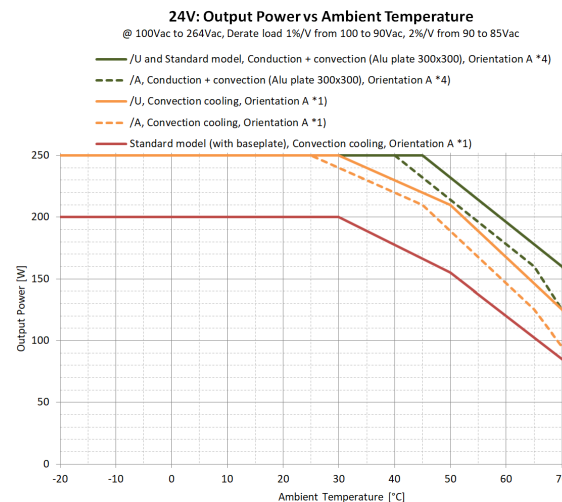

Output Power vs Ambient Temperature (forced air cooled) all CUS250M voltages

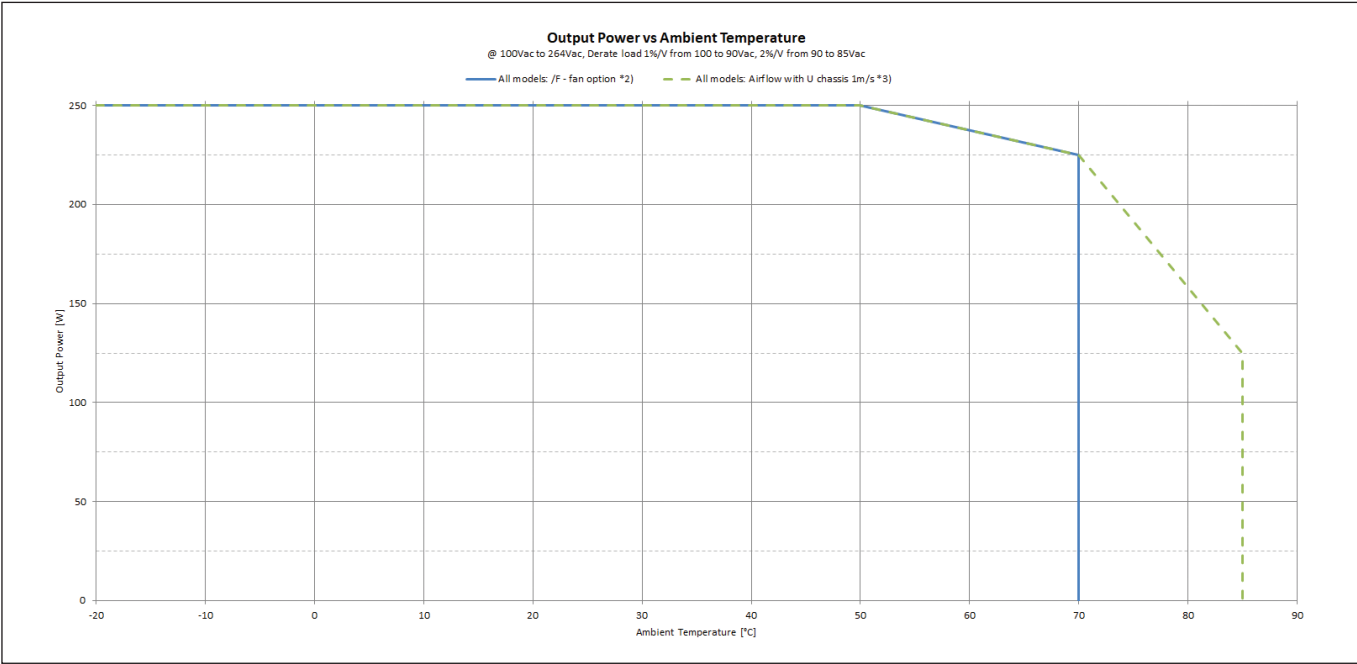


Standby and Fan Output Power vs Ambient Temperature

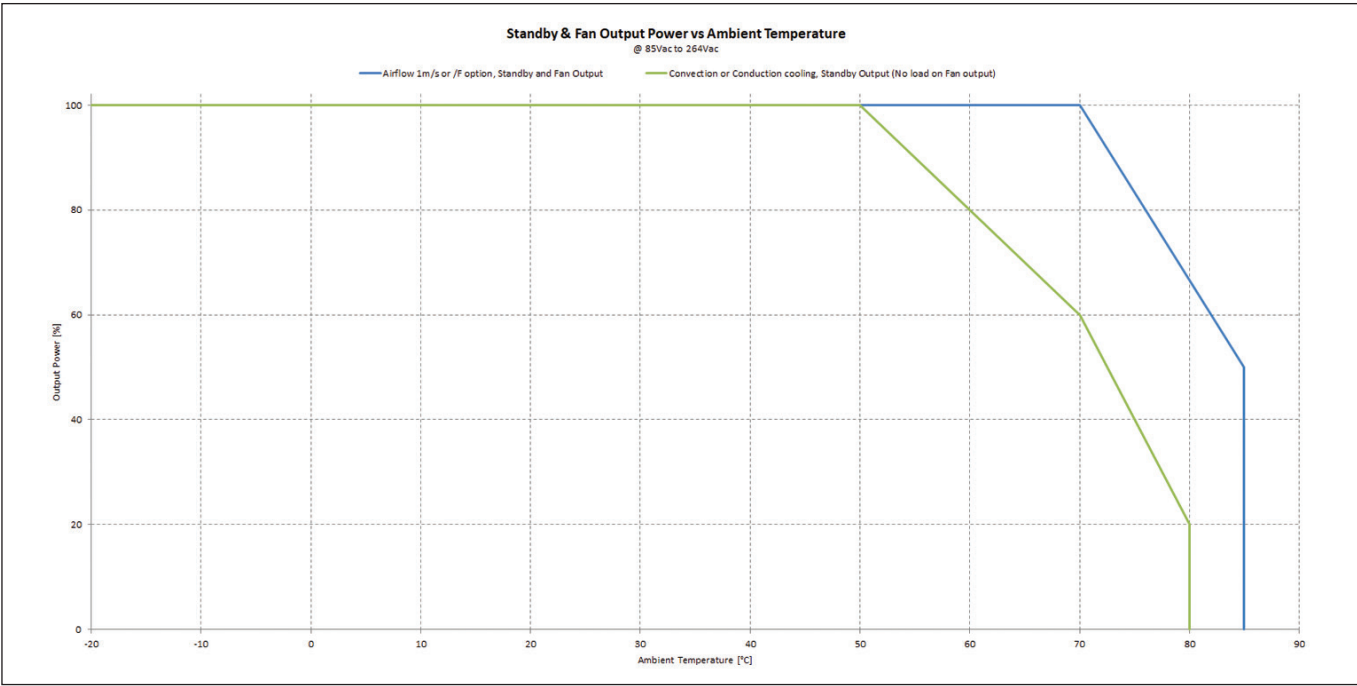


Notes

- 1: Orientation A (see Application Note), 50mm above surface.
Standby output is loaded (see derating curves for Standby output), no load on Fan output
- 2: 50mm above surface. Limited by fan specification to 70°C maximum
- 3: Tested with U chassis with airflow direction 1 (see Application Note).
Customer to ensure airflow rate and direction to keep components temperature below the limits.
Standby and Fan output load according to derating curves.
Measured in wind tunnel with 5mm space on side of U chassis.
- 4: Mounted on natural aluminium plate, 300x300x1mm lifted 50mm above other surfaces
Orientation A (see Application Note)
Standby output is loaded (see derating curves for Standby output), no load on Fan output


Outline Drawing CUS250M Open Frame Unit (Integral baseplate)

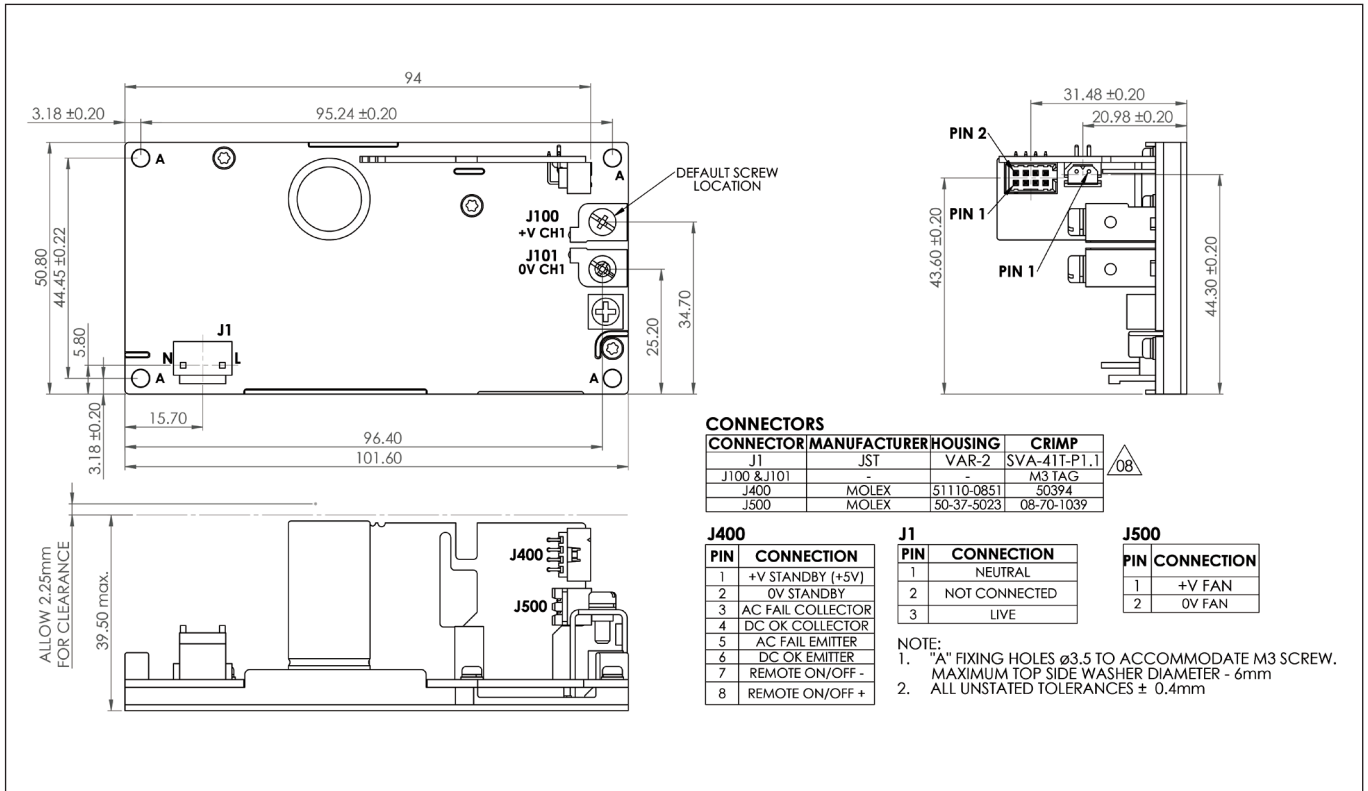


Outline Drawing CUS250M/C Open Frame Unit with inserts (Integral baseplate)

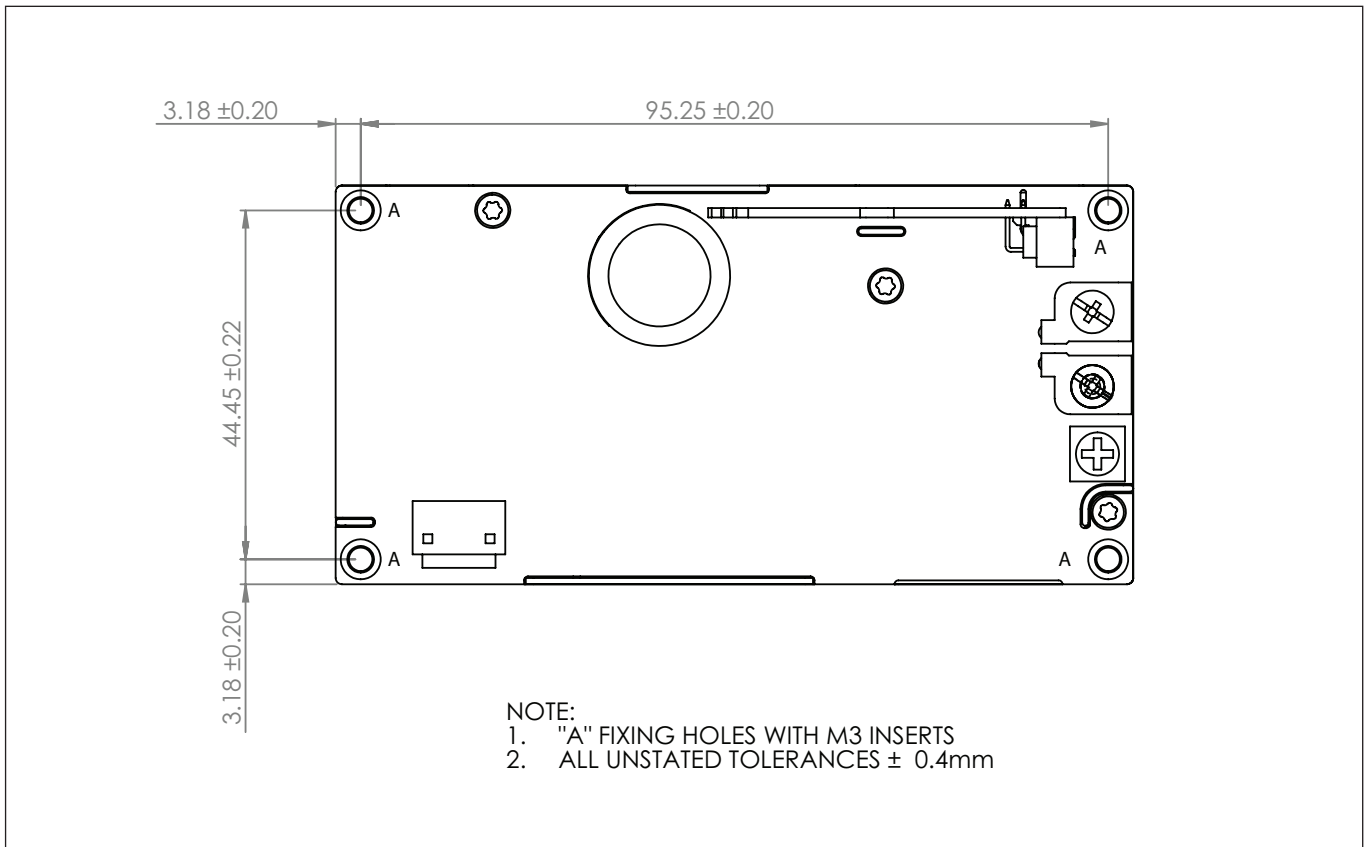


Outline Drawing CUS250M/U (U Channel) Option

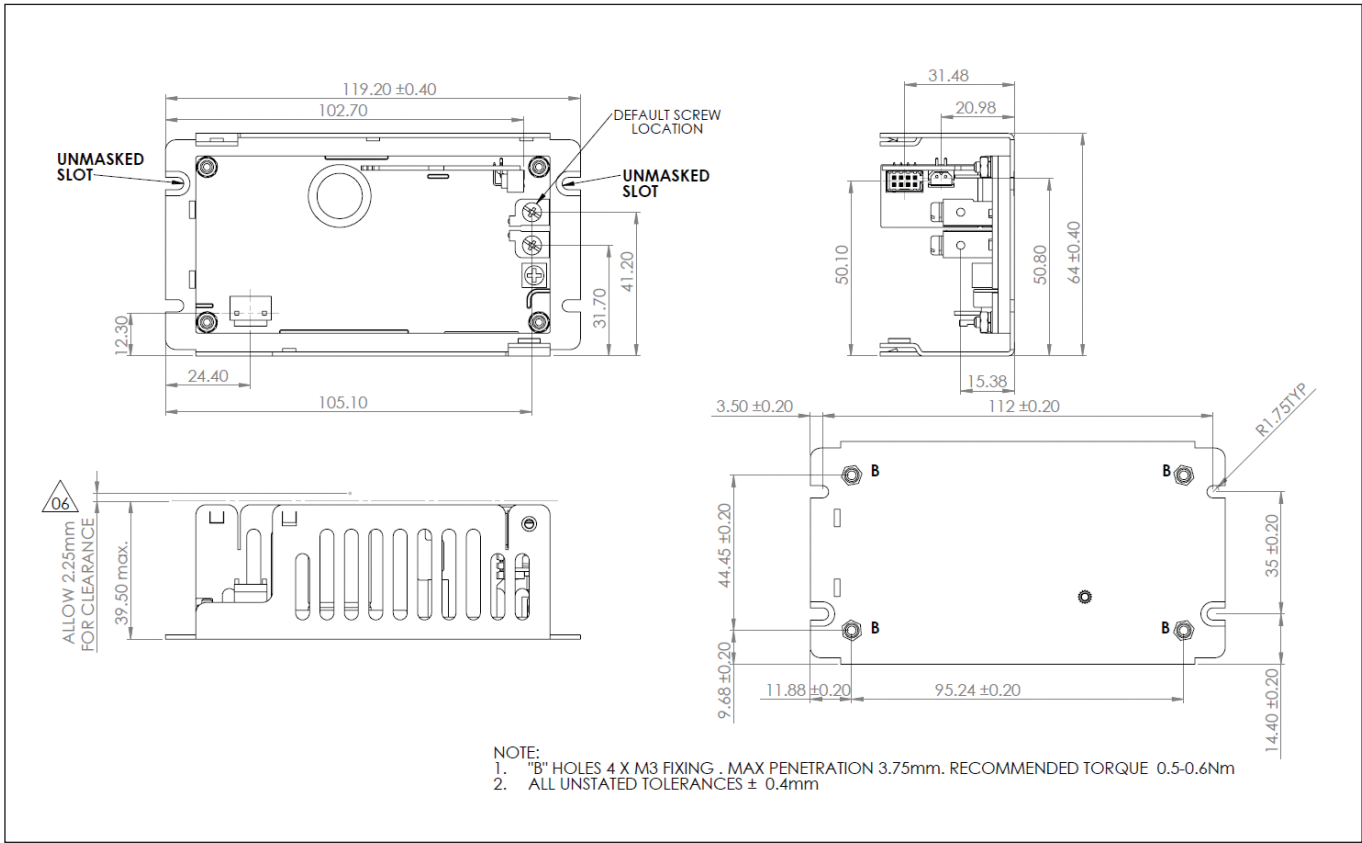

Outline Drawing CUS250M/A (U Channel with Cover) Option

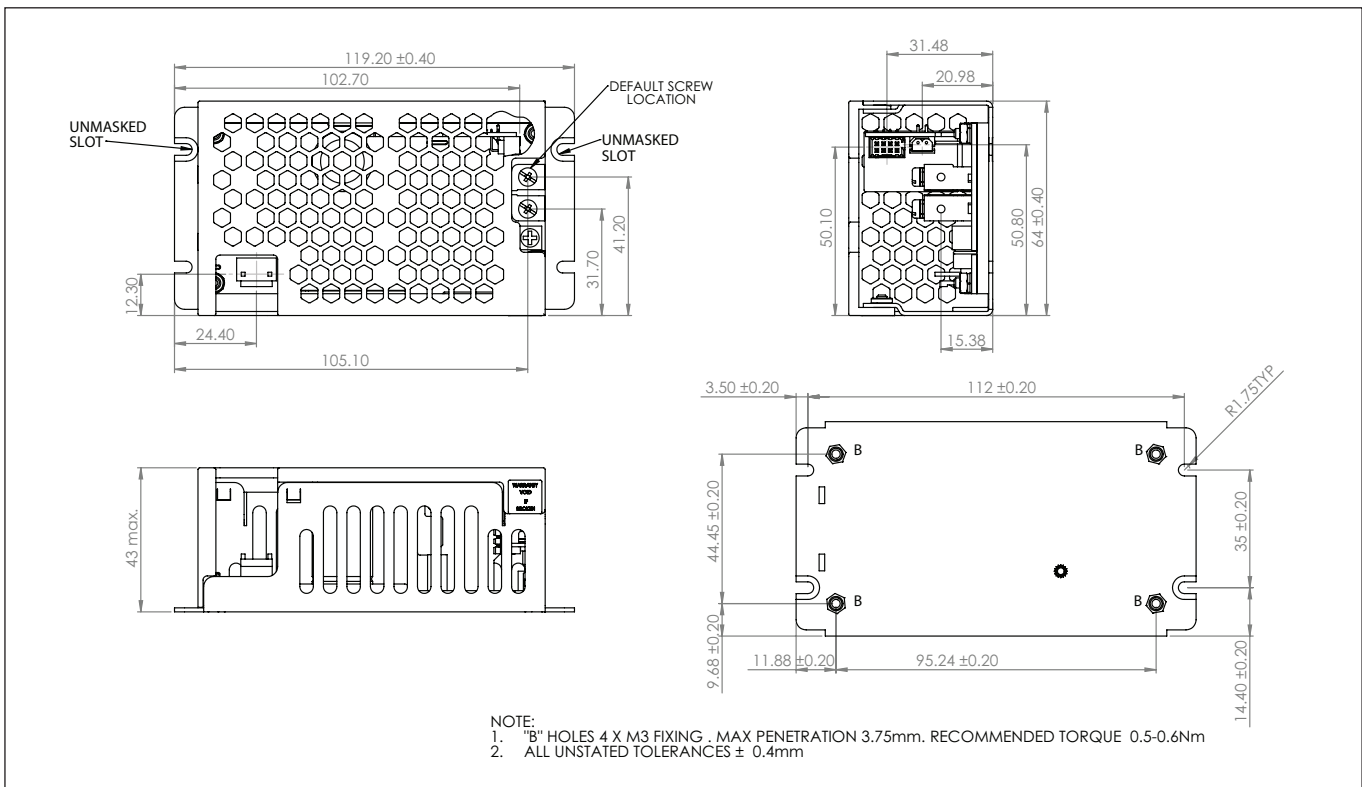

Outline Drawing CUS250M/F (U Channel with Cover & Top Mounted Fan) Option

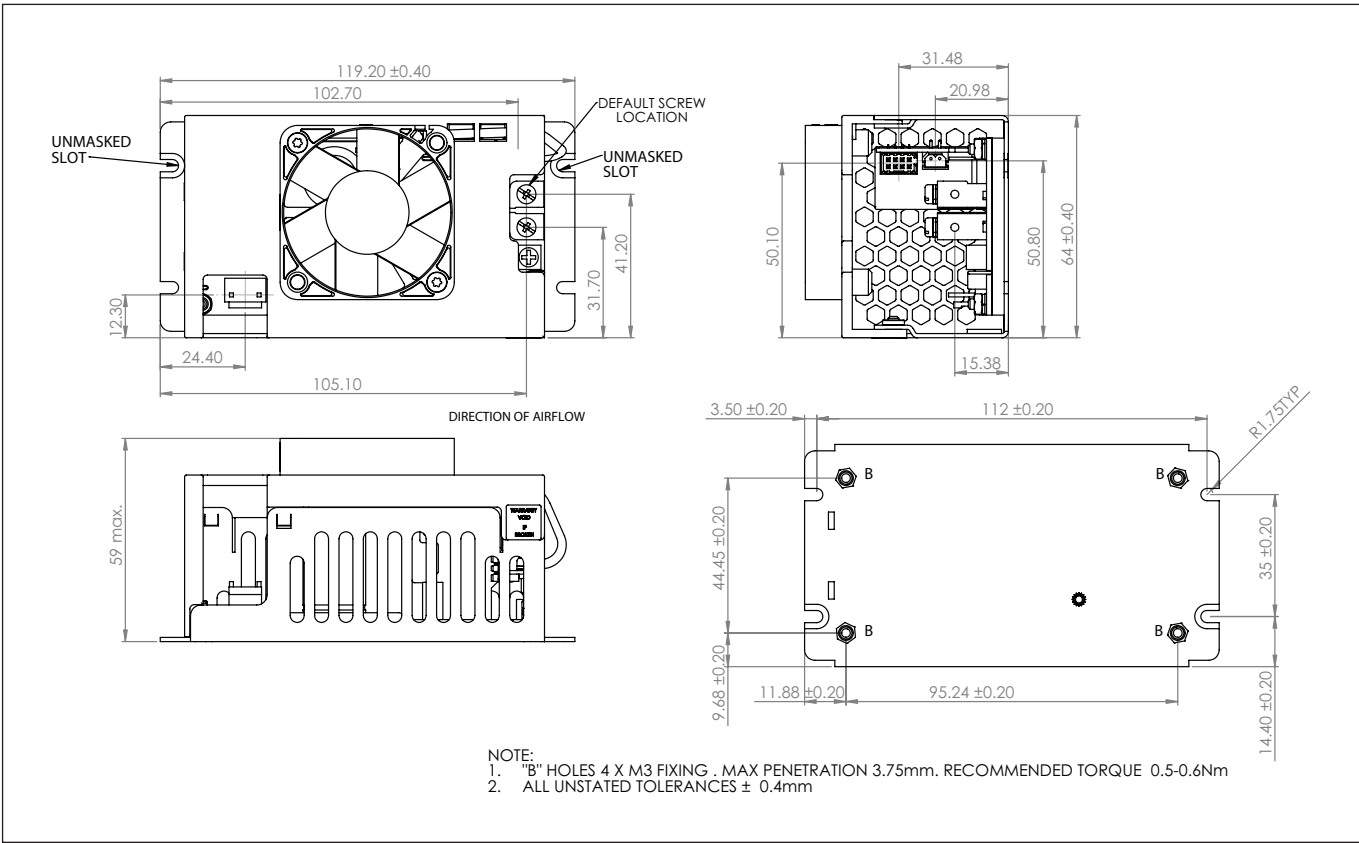



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
 ttf.fr-powersolutions@tdk.com
 www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
 ttf.it-powersolutions@tdk.com
 www.emea.lambda.tdk.com/it



Netherlands

ttf.nl-powersolutions@tdk.com
 www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
 tlg.powersolutions@tdk.com
 www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
 tlg.at-powersolutions@tdk.com
 www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
 tlg.ch-powersolutions@tdk.com
 www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
 tlg.dk-powersolutions@tdk.com
 www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
 tlu.powersolutions@tdk.com
 www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
 tti.powersolutions@tdk.com
 www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
 tia.powersolutions@tdk.com
 www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
 sales.br@tdk-electronics.tdk.com
 www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
 www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
 tlc.powersolutions@tdk.com
 www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
 tis.marketing@tdk.com
 www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
 mathew.philip@tdk.com
 www.sg.lambda.tdk.com

